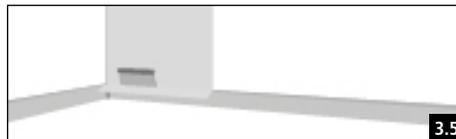
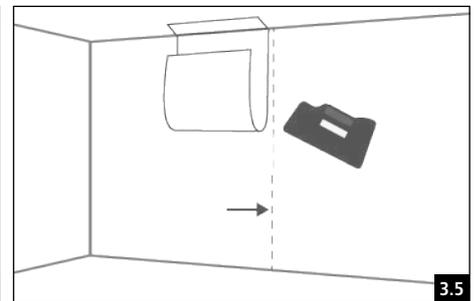
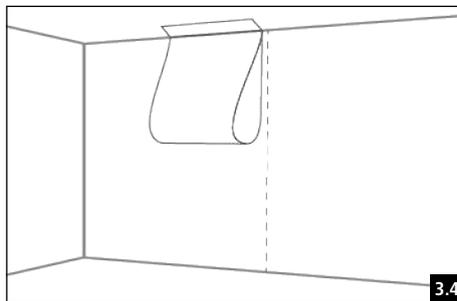
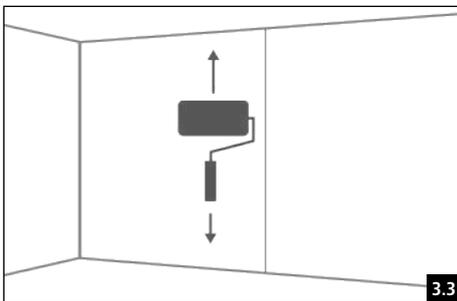
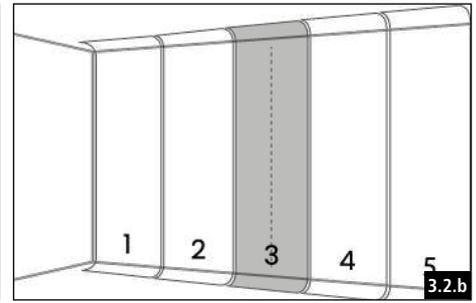
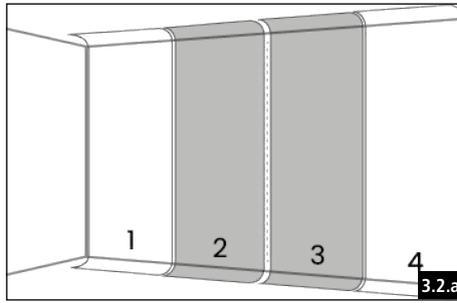
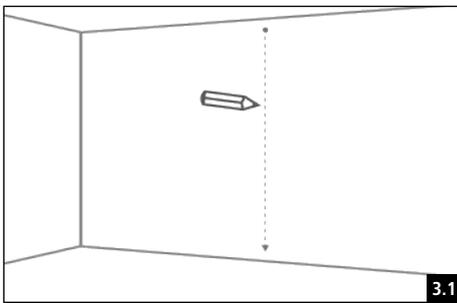


INSTALLATION INSTRUCTIONS

SKINS MURALS

**I. BEFORE INSTALLATION**

The information given in these installation instructions follows general standards. All instructions and advice must be followed to ensure a correct and satisfactory installation. The wallpaper coating of the SKINS MURALS series must be stored and installed indoors. It is suitable for walls that are not in direct contact with water in kitchens and bathrooms. It is the responsibility of the installer/owner to carefully inspect the material for defects prior to installation. The warranty does not cover materials installed with visible defects. If you are not satisfied with the material prior to installation, contact your dealer. **DO NOT INSTALL.** We recommend that you, as the final inspector, examine the material supplied to match the material ordered, color, design and finish, **BEFORE** installation. We recommend that you purchase all the wallpaper you will need in the same order and production shade, as there will be slight shade changes between different dyes/batches. Check that the material is correct. We will not be responsible for any costs incurred once the piece with visible defects is installed. It is the responsibility of the installer and the owner to ensure that job site and work area conditions are acceptable prior to installation of the material. To achieve a balance between a wallpaper of the quality of the SKINS collection, and a satisfactory finish, it is recommended that the installation be carried out by an experienced professional.

Installation of the material constitutes acceptance of the lot.

The technical data sheet of the product, which can be checked on the website www.anticcolonial.com, cannot reflect all the applications and conditions involved in the use of a material, so in case of situations not described in the data sheet, it is recommended to consult our technical department.

Materials with different shades/production batches cannot be mixed, unless expressly approved by L'Antic Colonial. Check that all the material comes from the same collection and is made in the same batch.

II. SUBSTRATE REQUIREMENTS

In order to achieve the best results, it is important that the substrate on which the wallpaper roll is to be installed is properly prepared. Check that the substrate is smooth (no holes, cracks, irregularities...), dry, clean, solid and has adequate absorption. Remove the old paper if there is any. The color of the wall must be uniform and light-colored.

III. INSTALLATION

Tools needed: large scissors, cutter, plumb or level, metal ruler, pencil,

brush, roller, wallpaper brush or rubber spatula, sponge, clean rag, measure tape, corner roller, rubber joint roller, ladder.

For an aesthetically satisfactory finish, make a laying plan before starting.


Each design in the SKINS MURALS series consists of several rolls that are individually numbered. The installation should be carried out according to the enclosed drawing.

As a general rule, each design has a side waste (varying in size but equally divided on the right and left side of the design) and a height waste on the top and bottom of the design.

In special cases and at the specific request of the customer, the position and size of the waste may differ from the standard conditions described above. In these cases, the laying instructions presented below may differ from the actual conditions. In case of doubt or need, we recommend not to start laying and to contact L'ANTIC COLONIAL customer service.

3.1. Using a plumb line, draw a line in the center of the wall that will serve as a reference to indicate the right end of the roll, with the corner of the wall being the reference for the other end.

3.2. Open the roll, and make sure it is laid out in the right direction.

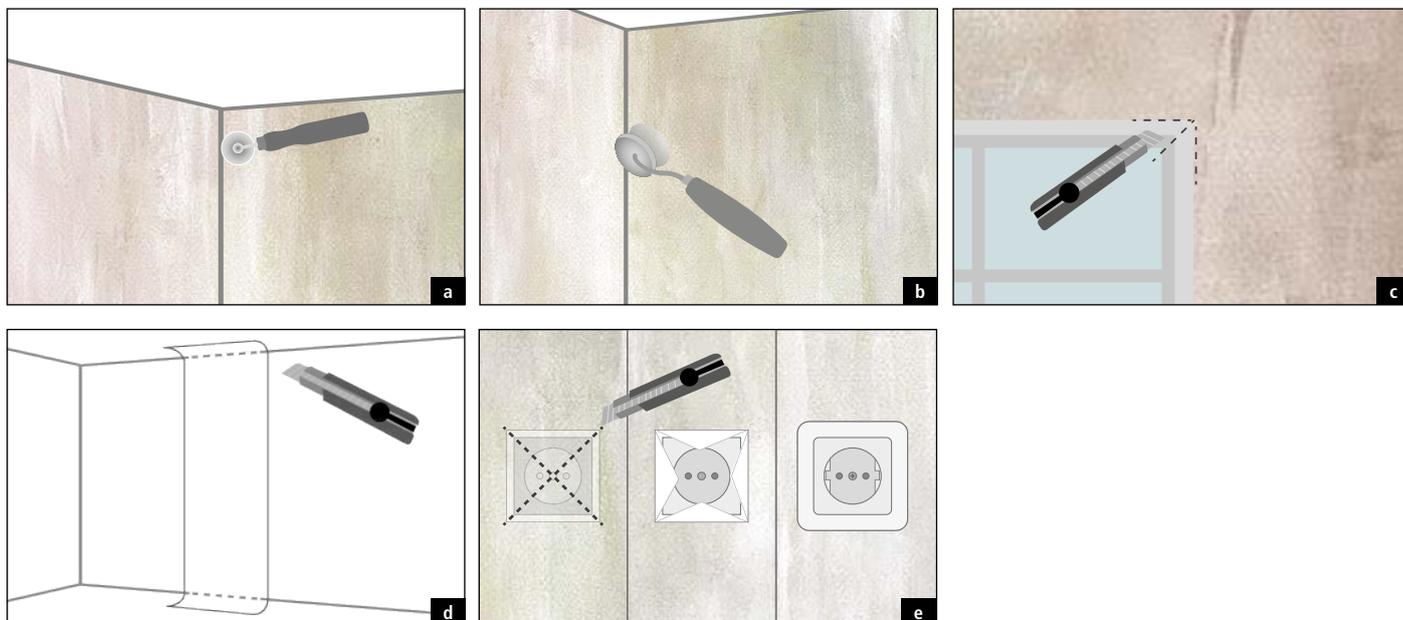

For the following rolls to match side by side, take into account the location indicated on the drawing, and the numbering of each roll.

3.2.a In the case of an even number of rolls, installation should be carried out so that the junction of the two central strips matches the line marking the center of the wall. The installation can start from any of the two central strips mentioned.

3.2.b In the case of an odd number of rolls, the installation should start at the center strip and be carried out so that the center of this center strip coincides with the center of the wall marked above.

3.3. Apply the glue with a roller directly on the wall, at least 10 cm wider than the width of the paper to be glued. Use a brush to apply the glue in corners, near frames, and difficult areas, and use the roller for large areas. It is easy to identify the area where the glue has been applied thanks to the pink color of the SKINS FIX glue, the glue becomes transparent once dry. After applying the adhesive, apply the wallpaper within 30 minutes. Clean the tool with lukewarm water immediately after use.

L'Antic Colonial recommends using Butech's SKINS FIX glue for proper application. Check that the application temperature is between +10°C and +25°C. Follow the instructions of the glue manufacturer, for more information consult www.butech.net.

3.4. Roll the strip upside down without making folds that could cause wrinkles. Start laying by fixing the upper part, leaving 3 cm above, which will later be trimmed, and respecting the reference line drawn with the plumb line or level. Do not overlap strips on top of each other.

3.5. Gently press the upper half of the paper strip using a wallpaper brush or rubber spatula, without losing sight of the reference line. Proceed in the same manner, spreading the lower half of the roll. To avoid bubbles, pressure should be applied from top to bottom and from the center to the ends. Press the paper against the ceiling and against the skirting board with a ruler or rubber spatula.

Before drying, wipe the joints with a dry cloth to ensure proper adhesion.

To ensure proper adhesion at the joints between rolls, press along the strips using a rubber joint roller.

IV. INSTALLATION TIPS

Here are some installation tips to solve some of the most common areas that can be found in a room:

a. In inside corners, make sure there are no imperfections or irregularities, continue laying the roll, and use a corner roller to achieve a perfect adherence.

b. Outside corners. To avoid imperfections in the finish of the corners, make sure that there are no bumps or irregularities. Adhere the roll along the corner, and make sure that the cut does not end at the edge, occupy a minimum distance of 5 cm from the next wall. Use a corner roller to achieve a satisfactory adhesion.

c. Junctions with door and window frames. In the junction with window and door frames, place the paper strip and overlap 5-10 cm above the frame. Make a diagonal cut from the corner.

Adjust the paper to the edge of the window frame, pressing with a metal ruler against the frame, as you did against the skirtings, and trim the excess with a metal ruler and a knife, when the glue is dry.

d. Before it dries, wipe off the glue excess with a damp rag or damp sponge, wipe the sponge or rag constantly, always using clean water. Once completely dry, trim the upper and lower excess.

e. To fix finishes on recessed elements such as electrical sockets or switches:

- disconnect the power supply
- dismantle the trim
- cut the paper crosswise
- fold the 4 pieces outwards, and finish by trimming the excess and replacing the trim.

MAINTENANCE AND CLEANING

The SKINS MURALS collection stands out for its quality and resistance. Wallpaper as a decorative element does not get dirty easily with regular use, however, it requires minimal maintenance and cleaning.

For ordinary maintenance it is recommended to use a feather duster, or a soft dry cloth.

SKINS MURALS can be easily cleaned with a sponge lightly dampened with water. Rub gently, avoiding the paper to get wet, then wipe with a dry cloth.

Despite the resistance of SKINS MURALS in normal use, it can be affected by the action of more aggressive agents and accidental stains since prolonged exposure to certain chemicals and substances can irreparably alter its appearance. To try to minimize as much as possible the action of these agents in the event that your wallpaper suffers a stain:

- clean as soon as possible, use a dry cloth first to absorb it and avoid spreading it.
- then proceed with a slightly damp sponge with soap and water.
- rub delicately.
- finish by drying with a soft cloth.

Good prevention is essential when there is a risk of staining; avoid these situations as much as possible, as there are stains that can leave permanent marks after cleaning.

Never use aggressive products (bleach, ammonia, all-purpose cleaners...), or overly abrasive sponges or scouring pads, as they can permanently damage the paper.

Uninstallation: this type of paper allows the task of removing the paper by simply pulling from the bottom, dry, which is a quick, clean, and easy way to carry out the uninstallation.

WARRANTY

You can check the warranty conditions of the product on the website www.anticcolonial.com, in the catalog, or by contacting your distributor.